




**SLIDEMOOR DOCKING SYSTEMS
PRE-INSTALLATION OWNER RECOMMENDATIONS**

Congratulations on your decision to become a SlideMoor owner! We are certain that your new SlideMoor docking System will exceed your expectations. And thank you for trusting SlideMoor to install your new System. You can be assured that your System will be installed properly and will operate as designed.

However as the new SlideMoor Owner, there are three simple things you must do if we are to provide you with the service you have come to expect from SlideMoor. They are listed below in no specific order.

1. You will need to make a mark on each of the pilings designed to support your SlideMoor System exactly where the rub rail of the boat rests against the piling at dead low (the lowest possible) tide. This mark will determine how high the aluminum SlideMoor Tracks should be mounted to provide you with the most effective vertical range of your System. See diagram below.

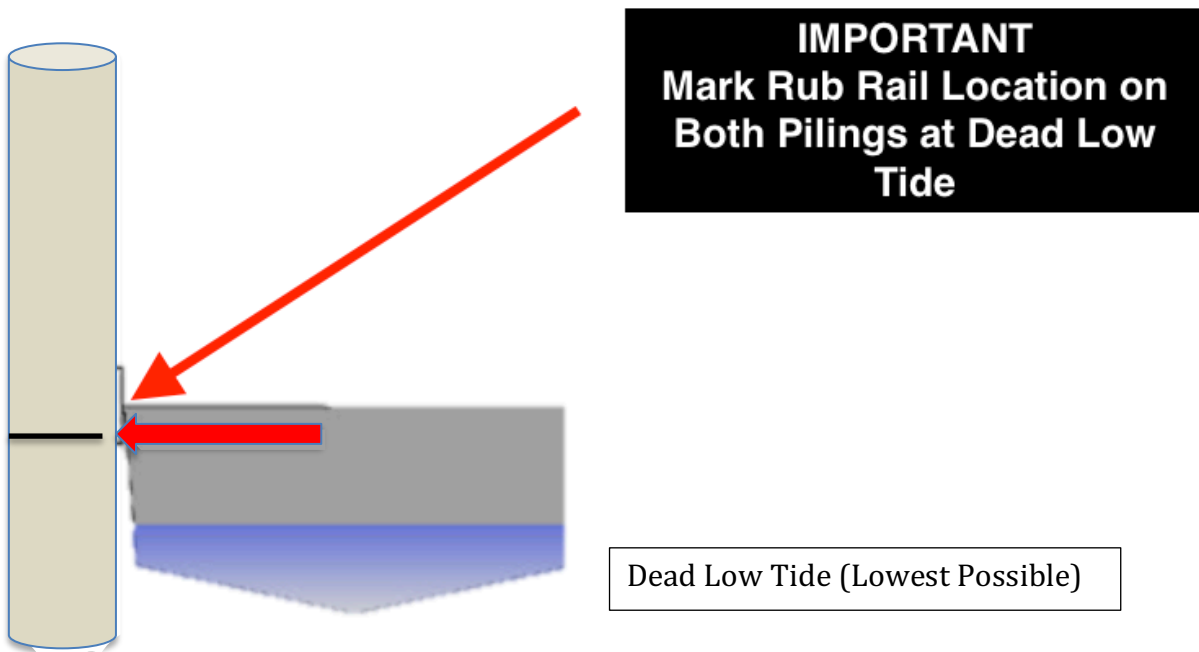

2. You should have the boat at the dock or at least available to the dock so the Slides for your System are properly adjusted for your specific vessel and rub rail design.
3. You should be available at the dock upon completion of the SlideMoor Docking System installation so our trained installers can show you exactly how to tie up properly. Proper tie-up procedures are critical to the safe and effective use of your new SlideMoor System.

Complying with these simple requests will ensure that your System is installed and used correctly.